

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 September 2001 (27.09.2001)

PCT

(10) International Publication Number
WO 01/71844 A1

- (51) International Patent Classification⁷: **H01Q 1/24**,
1/22, 1/08
- (21) International Application Number: PCT/CA01/00386
- (22) International Filing Date: 21 March 2001 (21.03.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/534,016 24 March 2000 (24.03.2000) US
- (71) Applicant (for all designated States except US): **SIERRA WIRELESS, INC.** [CA/CA]; Suite 150, 13575 Commerce Parkway, Richmond, British Columbia V6V 2L1 (CA).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **VANDERHELM,**

Ron [CA/CA]; 13325 28th Avenue, Surrey, British Columbia V4P 1X3 (CA). **MOU, Wei** [CA/CA]; 1349 Halifax Avenue, Port Coquitlam, British Columbia V3B 7J6 (CA). **GLEENER, Andrey** [CA/CA]; 5857 Neville Street, Burnaby, British Columbia V5J 2J3 (CA).


(74) Agent: **VERMETTE & CO.**; Box 40, Granville Square, 230-200 Granville Street, Vancouver, British Columbia V6C 1S4 (CA).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW). Eurasian

[Continued on next page]

(54) Title: **RETRACTABLE ANTENNA FOR PERSONAL COMPUTER CARD**

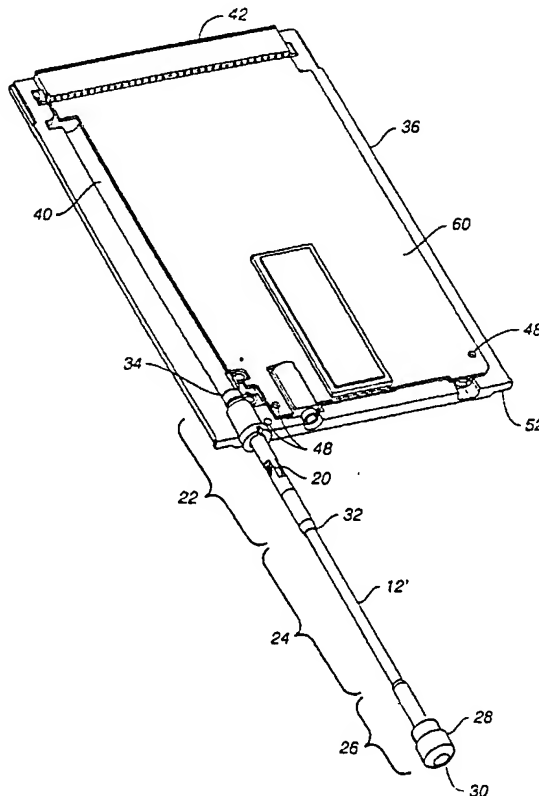

(57) Abstract: A device for providing wireless communication is disclosed. The device includes an antenna mounted on a personal computer card. The antenna has a pivotal connection for pivoting the antenna and a rotatable connection for rotating the antenna in a direction which differs from the direction of rotation. The antenna is rotatable about two axes and is retractable. In the extended position, the antenna is electrically connected with the personal computer card and can receive and transmit signals. The antenna also has a base which is detachably mounted to the personal computer card so that the antenna can be removed from said personal computer card and replaced.

WO 01/71844 A1

BEST AVAILABLE COPY



patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

RETRACTABLE ANTENNA FOR PERSONAL COMPUTER CARD

BACKGROUND OF THE INVENTIONField of the Invention

The invention relates to personal computer cards, and more particularly, the invention relates to personal computer cards having adjustable antennas.

Brief Description of the Related Art

Personal computer cards, particularly cards conforming to the Personal Computer Memory Card International Association (PCMCIA) standard, have become a mainstay of mobile computing. A variety of devices are available in the PCMCIA format, including memory cards, modems, and disk drives.

PCMCIA cards are available in multiple form factors, including, in order of increasing thickness, Type I, Type II, and Type III cards. The development of mobile computing has resulted in an increased demand for wireless modems.

Typically, a PCMCIA wireless modem card has a receive/transmit antenna attached. The conventional antenna substantially protrudes from the PCMCIA wireless modem card. This is a vulnerable position for the antenna since antennas mounted on mobile computers are prone to damage due to accidental bumping.

Accordingly, what is needed is an antenna for use with a PCMCIA card that is easily adjustable and replaceable.

SUMMARY OF THE INVENTION

Disclosed is a device that is used with a personal computer to provide wireless communication.

In accordance with one aspect of the present invention, the device includes an antenna mounted on a personal computer card. The antenna has a pivotal connection, for pivoting the antenna about a first axis, and a rotatable connection for rotating the antenna in a direction which differs from the direction of pivot about the pivotal connector. Further, the antenna is retractable. In the retracted position, the antenna is substantially received by the personal computer card. When the antenna moves from the retracted position to the extended position, the antenna is electrically connected with the personal computer card and can receive and transmit signals.

In accordance with an additional aspect of the present invention, the device includes a personal computer card, a base detachably mounted to the personal computer card, and a retractable antenna reciprocally mounted to the base. The personal computer card has a top portion which is attachable to a bottom portion. The base is detachable from the personal computer card so that the antenna can be removed from the personal computer card without separating the top and bottom portions of the personal computer card.

The foregoing and other advantages of the present invention will become more apparent from following description and accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described in greater detail with reference to the preferred embodiments illustrated in the accompanying drawings, in which like elements bear like reference numerals, and wherein:

FIG. 1 is a perspective view of an antenna mounted to a personal computer card which is connected with a personal computer in accordance with one embodiment of the present invention;

FIG. 2 is a perspective view of the personal computer card with the antenna in a retracted position;

FIG. 3 is a perspective view of the personal computer card illustrating that the antenna is rotatable about the X-axis and about a pivotal connection;

FIG. 4 is a perspective view of an inside surface of a top portion of the personal computer card;

FIG. 5 is a perspective view of an inside surface of a bottom portion of the personal computer card;

FIG. 6 is an enlarged partial view from 6-6 of FIG 5.; and

FIG. 7 is a close-up exploded view of the antenna and the personal computer card according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 shows one embodiment of a device 10 which provides for wireless communication. The device 10 includes a receive/transmit antenna 12 connected to the base of a personal computer card 14 which may include a modem or a radio. The personal computer card 14 plugs into a PCMCIA Type II slot 16 of a personal computer 18 and enables a user to communicate with a wireless system using an air interface.

The antenna 12 has a retracted position and an extended position. As shown in FIG. 2, the antenna 12 can reciprocally move between the retracted position and the extended position, shown in phantom lines as 12', in a direction of arrow A. In the retracted position, the antenna 12 is substantially received by the personal computer card 14. In the extended position, the antenna 12' substantially extends beyond the personal computer card 14.

FIG. 3 illustrates the antenna 12 pivotally rotated about a pivotal connection 20 from the extended position of FIG. 2, shown in phantom lines as 12', to a raised position where the antennae has been moved in a direction of arrow B. The pivotal connection 20 enables a user to adjust the position of the antenna 12 with respect to the personal computer card 14. The pivotal connection 20 may comprise any suitable means including, but not limited to, a hinge, such as a tongue-in-groove hinge. The pivotal connection allows the antenna 12 to pivot about an X-axis. Moreover, the antenna 12 is rotatable within a collar 58, and, therefore, has a rotatable connection for rotating the antenna about

a Z-axis. Therefore, the antenna 12 can move from the lifted position to a lowered position, shown in phantom lines as 12", when the antenna is moved in the direction of arrow C. Accordingly, when the antenna 12' is in the extended position, the antenna has multiple axes of rotation. In particular, the antenna 12 can pivot about the pivotal connector 20 and can rotate about the X and Z axes so that the antenna may be moved into the most appropriate position to maximize the effectiveness of use.

One embodiment of the antenna 12', as shown in FIG. 4, includes three main elongated elements: a first antenna portion 22 having a substantially constant outer diameter, a narrower second antenna portion 24, and a third antenna portion 26 which has an end cap 28 mounted at a distal end 30. The first antenna portion 22 includes a first end 32, a second end 34, and the pivotal connector 20 positioned between the first and second ends. The first antenna portion 22 is formed of a conductive metal or has a conductive metal plating.

The first antenna portion 22 connects to a matching circuit which performs the impedance matching function for the extended antenna. In a preferred embodiment, the matching circuit comprises an inductor/capacitor (LC) circuit. The connection of the antenna to the electronics of the personal computer card will be further described below.

FIGS. 3 - 5 illustrate one embodiment of the personal computer card 14. In this configuration, the personal computer card 14 includes a top portion 36, a bottom portion 38 which is attachable to the top portion, electrical components which are entirely enclosed by the top and bottom portions, and channel portions 40 located in the top and bottom

portions. Also shown is a PCMCIA connector 42. FIG. 5 illustrates the bottom portion 38 of the personal computer card 14 having at least one alignment pin 44 (FIG. 5 shows three alignment pins) which extends from an inside surface 46 of the bottom portion. FIG. 4 shows the top portion 36 having corresponding openings 48 which receive the alignment pins 44 when the top and bottom portions 36, 38 are attached to form a housing 50 for the personal computer card 14.

Preferably, the top and bottom outside surfaces 52, 54 of the top and bottom portions 36, 38 are substantially coated with a conductive material to provide shielding for the electrical components located inside the personal computer card 14. The top and bottom portions 36, 38 are preferably otherwise formed of plastic. As best shown in FIG. 3, a cut out portion 56 is provided in the top and bottom outside surfaces 52, 54 adjacent to the collar 58, which supports the antenna 12 when the antenna is extended. The cut out portion 56 electrically separates the conductive shielding material and the collar 58. In an alternative embodiment, the inside surfaces 60, 46 of the top and bottom portions 36, 38 are coated with a conductive material to provide good shielding for the electrical components located inside the personal computer card 14.

FIG. 5 shows the collar 58, which is detachably mounted to the housing 50 of the personal computer card 14. The collar 58 connects the antenna to the personal computer card 14. The collar 58 includes a distal end 62 having a flange 64, a proximal end 66, and a passage 68 which extends from the distal end to the proximal end. As will be further described below, the collar 58 and antenna 12 are designed to be removable from the

housing 50 without separating the top and bottom portions 36, 38 of the personal computer card 14. The flange 64 is mounted outside of the housing 50 and has at least one groove 70 to facilitate the removal of the collar 58 from the housing. The collar 58 is formed of a conductive metal. For example, the collar 58 may be threaded or otherwise fastened onto the personal computer card 14 to secure the antenna 12 in place. The collar 58 may then be unthreaded or otherwise unfastened from the card so that the antenna 12 may be replaced.

The passage 68 in the collar 58 is configured to slideably receive the antenna 12. Preferably, there is a friction fit between the outer diameter of the first antenna portion 22 and the inner diameter of the passage 68 to provide an electrical connection between the antenna 12 and the collar 58 and to provide a rotational connection between the antenna and the card. When the antenna 12 is in the extended position, the first antenna portion 22 snaps into and is juxtaposed to the collar 58. In addition, the second antenna portion 24 of the antenna 12 has a smaller outer diameter than the internal diameter of the first antenna portion 22. Accordingly, the second antenna portion 24 can slide freely within the passage 68 of the collar 58. The second antenna portion 24 is covered or coated with a nonconductive material.

Similarly, the third antenna portion 26 is covered or coated with a nonconductive material. The end cap 28 mounted at the distal end 30 of the third antenna portion 26 has an outer diameter larger than the inner diameter of the passage 68 of the collar 58. The end cap 28 prevents further insertion of the antenna 12 into the personal computer card

14 beyond a predetermined distance. Moreover, the end cap 28 provides a means for the user to grasp and reciprocally move the antenna 12 between the retracted position and the extended position.

A conductive member 72 is provided in the personal computer card 14 adjacent to the collar 58. The conductive member 72 is connected to electrical components enclosed in the personal computer card 14. The conductive member 72 may comprise any suitable means including, but not limited to, a torsion spring, a leaf spring, or a cantilever member. In one embodiment, the conductive member 72 is a torsion spring. As best shown in FIG. 6, the torsion spring 72 is compressed against the collar 58, thereby contacting the collar and ensuring a good electrical connection between the antenna and the electronics 74 in the personal computer card.

The antenna 12 is removable and replaceable from the personal computer card 14 so that the antenna may be replaced if it becomes damaged or broken. As shown in FIG. 7, the antenna 12 includes a base 74 with external threads 76. The threads engage internal threads located inside of a base housing 78 located in the personal computer card. The inner-most part of the base housing 78 includes a coil spring 80 that is used as the antenna electrical contact with the electronics in the personal computer card. The coil spring 80 is soldered to a connection to the electronics of the personal computer card and snaps into a corresponding groove inside channel 40. Since the antenna 12 may be unthreaded from the base 78, this embodiment allows the antenna to be replaced by the

user without having to ship the personal computer card back to the manufacturer or to a repair technician.

In the alternative, the antenna base 74 and the base housing 78 may be fastened together by a snap fit, wherein one of the pieces would have a raised male portion and the corresponding piece would have a female portion to accept the male portion, one piece snapping into the other.

In operation, the device functions to receive and transmit electrical signals to and from the personal computer card 14. When the antenna 12 is in the retracted position, the channel portions 40 of the personal computer card 14 substantially receive the antenna. Further, the third antenna portion 26, formed of a nonconductive material, is adjacent to the collar 58. The antenna 12 does not receive or transmit any signals when in the retracted position. By slidably moving the antenna 12 from the retracted position to the extended position, the first antenna portion 22, formed of a conductive material, contacts the collar 58, wherein a signal can be transmitted from electrical components enclosed in the personal computer card 14 through the conductive member 72 to the collar 58 and then to the antenna. As discussed, the antenna can pivot about the pivotal connector 20 and can rotate about the X-axis so that the antenna may be moved into the most appropriate position to maximize the effectiveness of use.

In an alternative embodiment, the antenna 12 is substantially similar to the embodiment shown in FIG. 5, except that the third antenna portion 26 is formed of a conductive material or has a conductive metal plating, similar to the first antenna portion

22. Moreover, the third antenna portion 26 includes a secondary antenna substantially contained in the end cap 28. Preferably, there is a very small clearance or a close fit between the outer diameter of the third antenna portion 26 and the inner diameter of the passage 68 in the collar 58. The close fit between the third antenna portion 26 and the collar 58 allows for an electrical connection between the antenna 12 and the collar when the third antenna portion is juxtaposed to the collar. For example, the end cap 28 can substantially contain a supplemental helical antenna. Accordingly, when the antenna 12 is in the retracted position, the third antenna portion 26 is adjacent to the collar 58, and an electrical connection is provided between the collar 58 and the helical antenna. Thus, the antenna 12 can transmit and receive signals in the retracted position, as well as in the extended position.

The personal computer card 14 shown in the figures is a PCMCIA Type II card, but it is within the scope of the invention to use a PCMCIA Type I or Type III card, as well. Likewise, it is within the scope of the invention that the personal computer card 14 can be any of a variety of removable cards that are not restricted to the PCMCIA standard specifications.

While the invention has been described in detail with reference to the preferred embodiments thereof, it will be apparent to one skilled in the art that various changes and modifications can be made and equivalents employed without departing from the present invention.

WHAT IS CLAIMED IS:

1. A device for providing wireless communication, the device comprising:
a personal computer card; and
an antenna mounted to the personal computer card, the antenna including
a pivotal connection for pivoting a portion of the antenna about a first axis and a
rotational connection for rotating the antenna about a second axis which differs
from the first axis;
the rotational connection allows the antenna to reciprocally move therein
so that the antenna has a retracted position and an extended position.
2. The device for providing wireless communication of Claim 1, wherein the
antenna is in the extended position, the antenna substantially extends beyond the personal
computer card and the antenna is electrically connected to the personal computer card.
3. The device for providing wireless communication of Claim 1, further
comprising the antenna being detachably mounted to the personal computer card.
4. The device for providing wireless communication of Claim 3, wherein the
personal computer card has a top portion and a bottom portion, and the antenna is

detachable from the personal computer card without separating the top and bottom portions of said personal computer card.

5. The device for providing wireless communication of Claim 1, wherein a spring located inside of the personal computer card is in electrical contact with the antenna.

6. The device for providing wireless communication of Claim 5, wherein the spring provides an electrical connection between the personal computer card and the antenna when antenna is extended a distance beyond said personal computer card.

7. The device for providing wireless communication of Claim 5, wherein the spring is a torsion spring.

8. The device for providing wireless communication of Claim 4, wherein the top portion of the personal computer card has a conductive layer for providing electrical shielding for the personal computer card.

9. The device for providing wireless communication of Claim 8, wherein the conductive layer has a cut out portion which electrically separates the conductive layer from the antenna.

10. The device of providing wireless communication of Claim 3, wherein the device further comprises a collar that is removably fastened to the personal computer card to secure the antenna.

11. A device for providing wireless communication, comprising:
a personal computer card;
an antenna mounted to the personal computer card, the antenna having a retracted position and an extended position; and
a collar detachably mounted to the personal computer card wherein, when the collar is detached from the personal computer card, the antenna can be removed from said personal computer card.

12. The device for providing wireless communication of Claim 11, wherein the antenna has a rotational connection with the personal computer card.

13. The device for providing wireless communication of Claim 12, wherein the antenna has a pivotal connection.

14. The device for providing wireless communication of Claim 13, wherein the rotational connection and the pivotal connection allow the antenna to be moved about two axes.

15. The device for providing wireless communication of Claim 11, wherein the personal computer card includes a top portion and a bottom portion, wherein the antenna is detachable from the personal computer card without separating the top and bottom portions of said personal computer card.

16. The device for providing wireless communication of Claim 11, wherein the personal computer card includes a conductive layer that has a cut out portion which electrically separates the conductive layer from the collar.

17. A device for providing wireless communication having a personal computer card, comprising:

an antenna having a base;

the personal computer card having a base housing with the antenna base secured within the base housing.

18. A device for providing wireless communication of Claim 17, wherein the antenna base is secured within the base housing by a fastening means.

19. A device for providing wireless communication of Claim 17, wherein the fastening means are threads.

20. A device for providing wireless communication of Claim 17,
wherein the fastening means is a snap fit between the antenna base and the base housing.

1 / 6



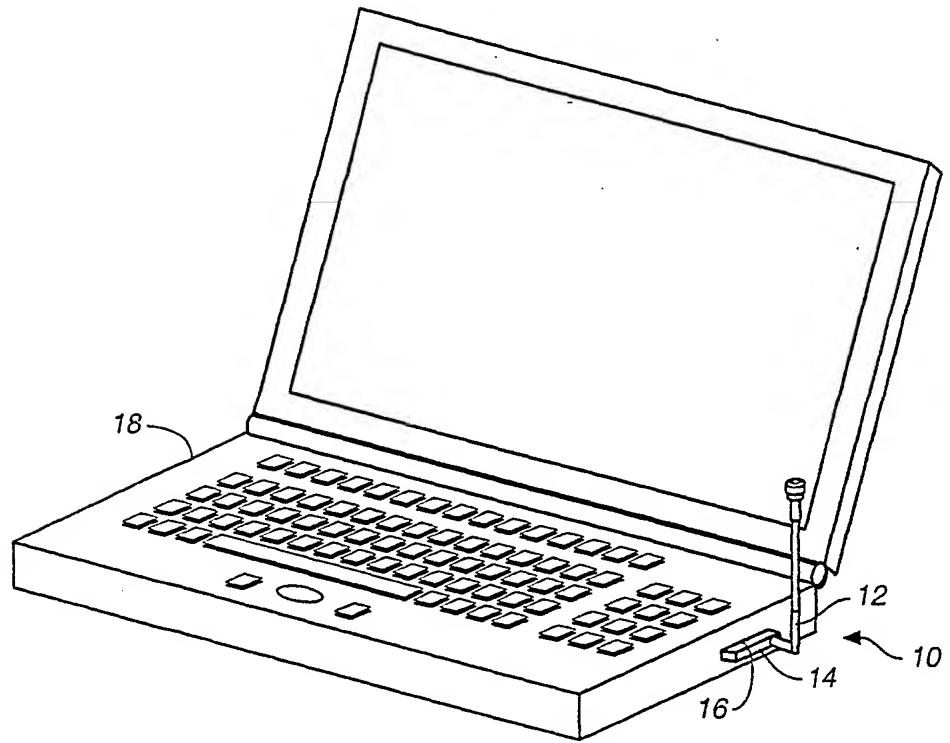


FIG. 1

2 / 6

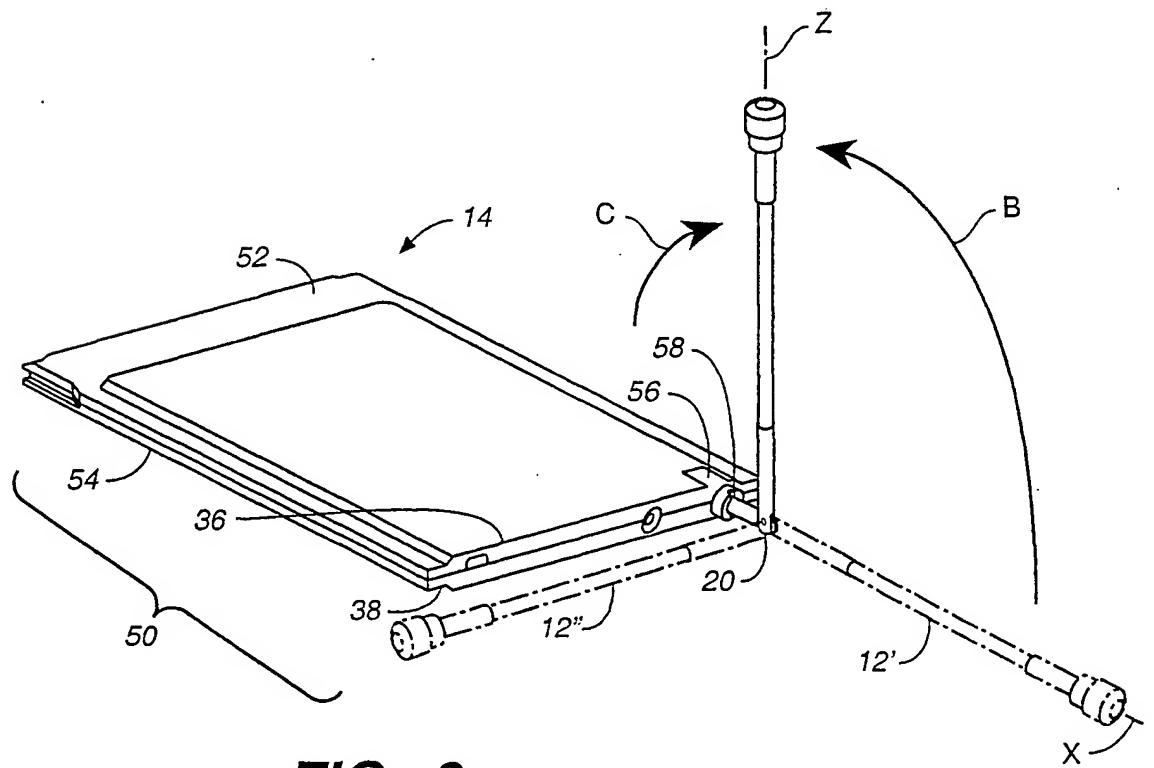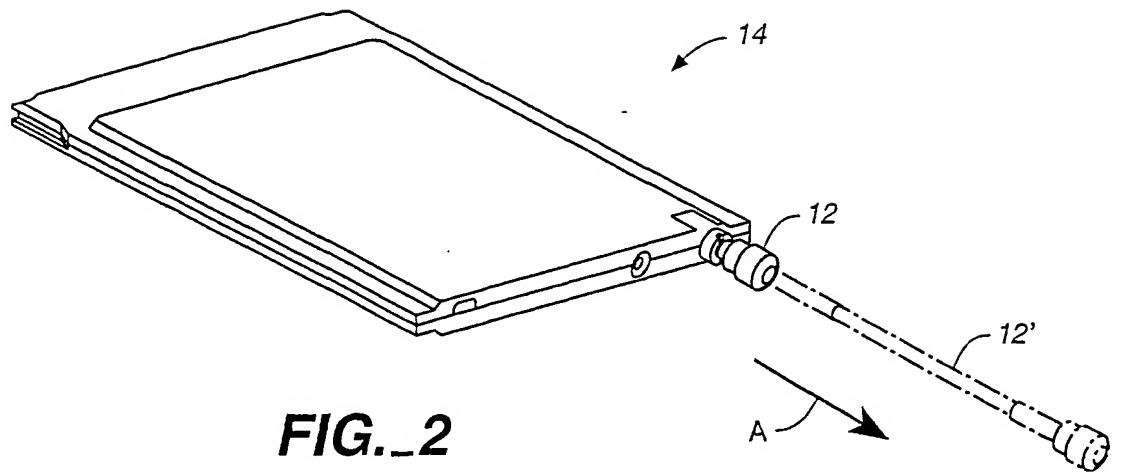

3 / 6


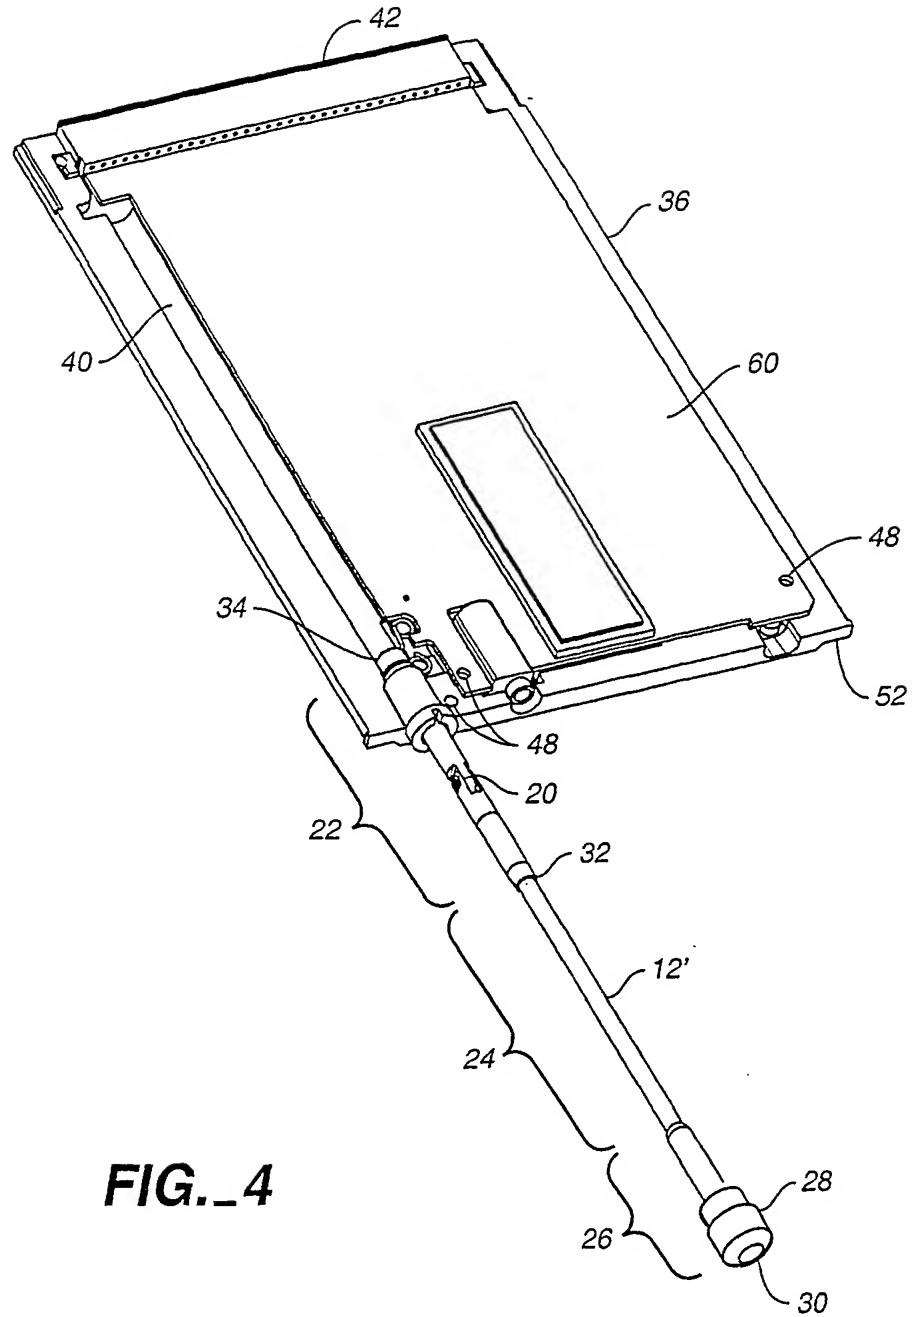


FIG. 4

4 / 6

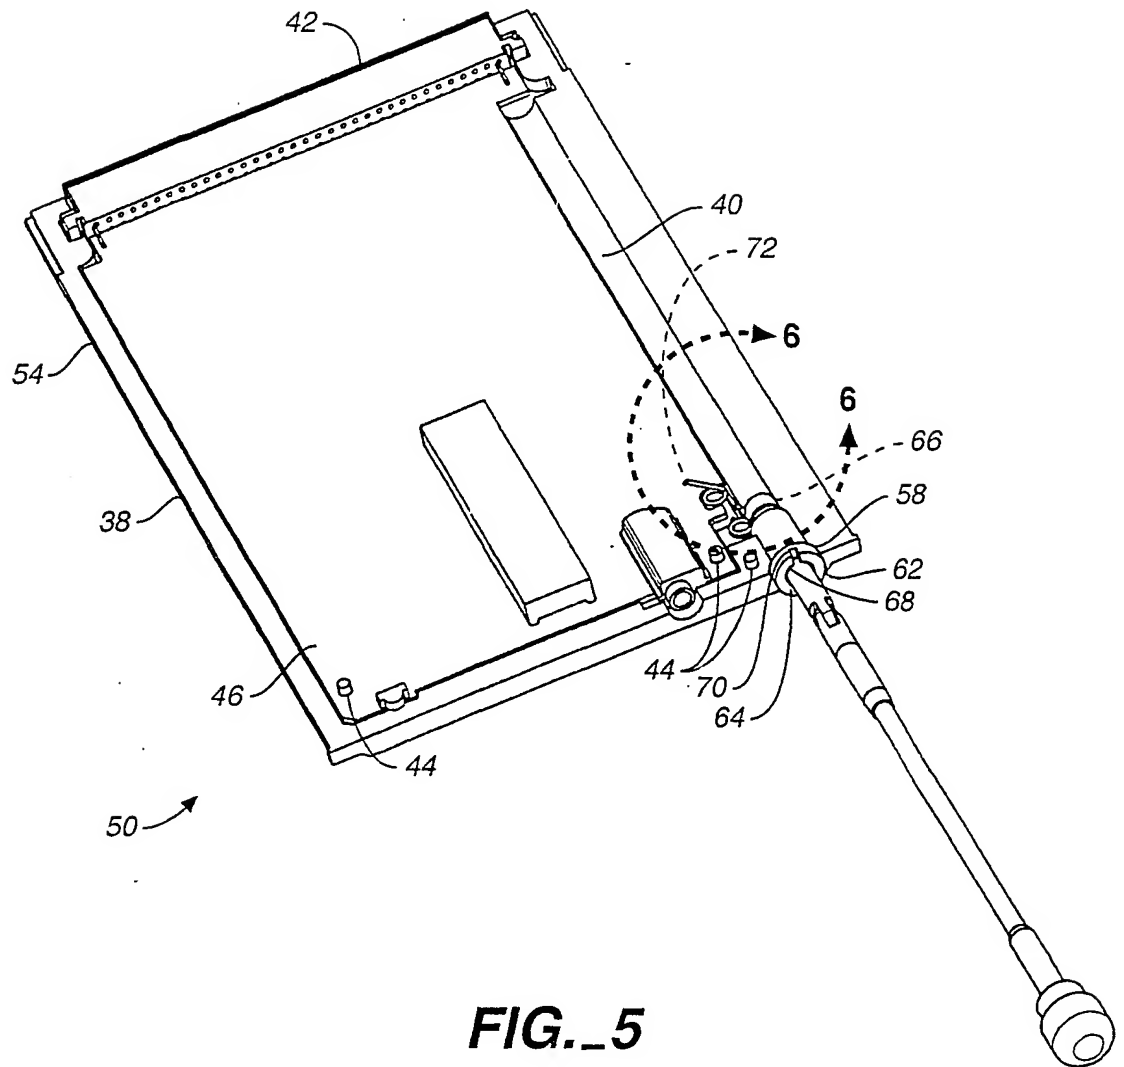

SUBSTITUTE SHEET (RULE 26)

5 / 6


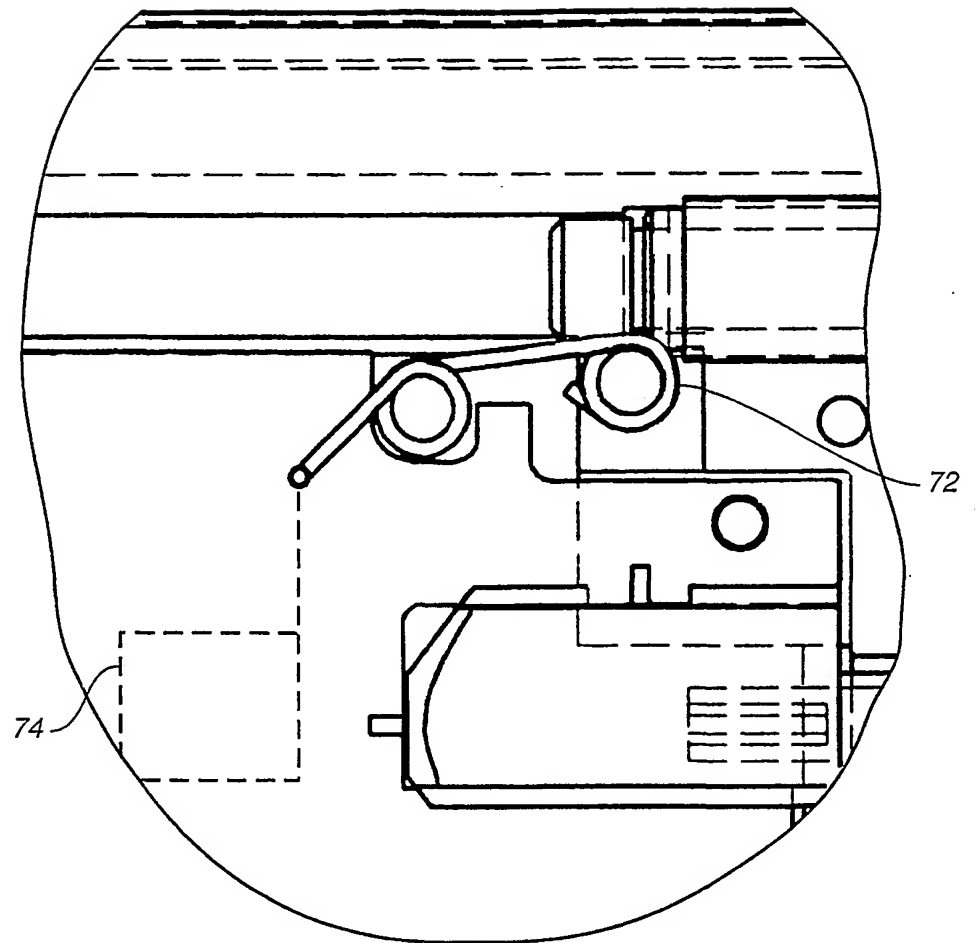


FIG. 6

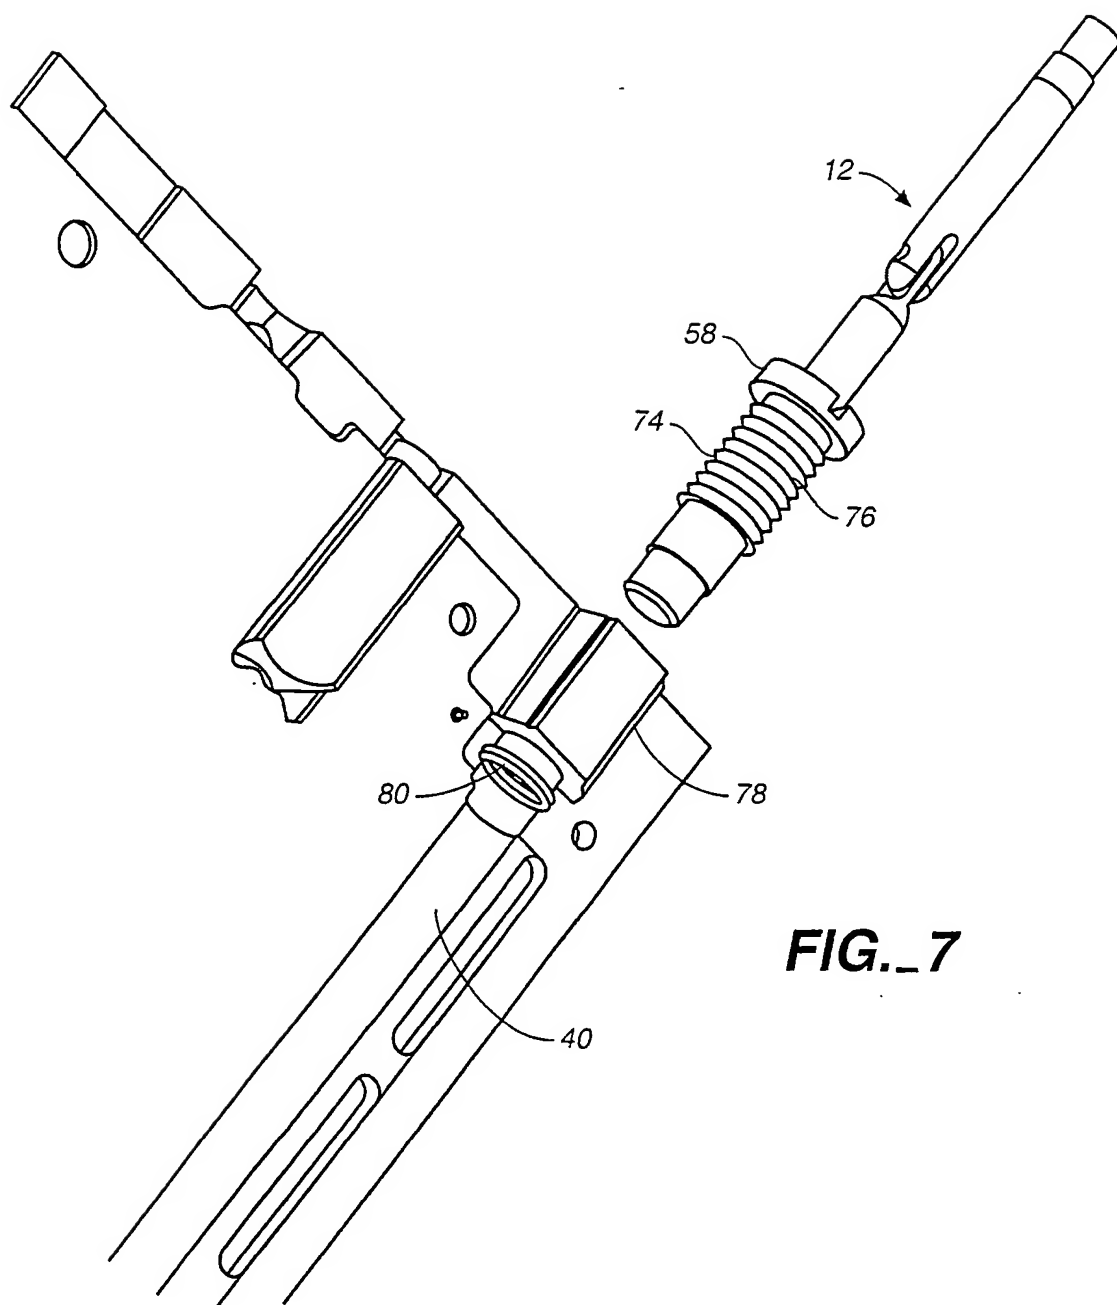

INTERNATIONAL SEARCH REPORT

International Application No.

PC 01/00386

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H01Q1/24 H01Q1/22 H01Q1/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 949 379 A (YANG JUI-LIN) 7 September 1999 (1999-09-07)	17-20
Y	column 1, line 33 - line 52	1-4,8,9
A	column 3, line 27 - line 41 column 4, line 1 - line 2; claim 2; figures 1,9,10	11-15
Y	US 5 644 320 A (ROSSI MARKKU J) 1 July 1997 (1997-07-01)	1-4,8,9
	column 3, line 14 - line 39; figures 1-6	
A	GB 2 327 153 A (NOKIA MOBILE PHONES LTD) 13 January 1999 (1999-01-13)	10,11,20
	the whole document	
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

23 August 2001

Date of mailing of the international search report

04/09/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Moumen, A

INTERNATIONAL SEARCH REPORT

International Application No
PCT/CA 01/00386

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP 0 773 633 A (NOKIA MOBILE PHONES LTD) 14 May 1997 (1997-05-14) column 4, line 11 - line 16 column 5, line 6 - line 25; figure 1 -----</p>	5-7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP 01/00386

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5949379	A	07-09-1999	NONE	
US 5644320	A	01-07-1997	NONE	
GB 2327153	A	13-01-1999	US 6201712 B	13-03-2001
EP 0773633	A	14-05-1997	GB 2307107 A	14-05-1997
			US 5856806 A	05-01-1999

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)